Dynamic Positioning Committee

Marine Technology Society

## Sensors

# Combining GNSS and Inertial Navigation Systems in Improved DP Position Reference Systems

**Arne Rinnan**
**Kongsberg Seatex**

*October 9-10, 2007*

Return to Session Directory

KONGSBERG

**WORLD CLASS** – through people, technology and dedication

KONGSBERG

We maximize marine performance by providing

# THE FULL PICTURE

Return to Session Directory

KONGSBERG

# Combining GNSS and Inertial Navigation Systems in Improved DP Positioning Reference Systems

Dynamic Positioning Conference 2007

by

Arne Rinnan, Kongsberg Seatex AS

© KONGSBERG November 7, 2007

Return to Session Directory

# Presentation Outline

KONGSBERG

- Track record, 1990 - 1997
- The future of GNSS
- GNSS error sources
- Integrated GNSS/IMU for DP Operations
- GNSS/IMU Solution architecture
- Test flights, 2007
- Conclusion

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

# Track Record

# 1990 - 1997

© KONGSBERG November 7, 2007

Return to Session Directory

# 2 x Platform Position Monitoring System

KONGSBERG

- Delivered to Snorre TLP and Troll B
- Used for precise monitoring of platform dynamics
- Carrier aided DGPS combined with Honeywell ring laser gyro
- “Tight coupling” GPS/IMU solution

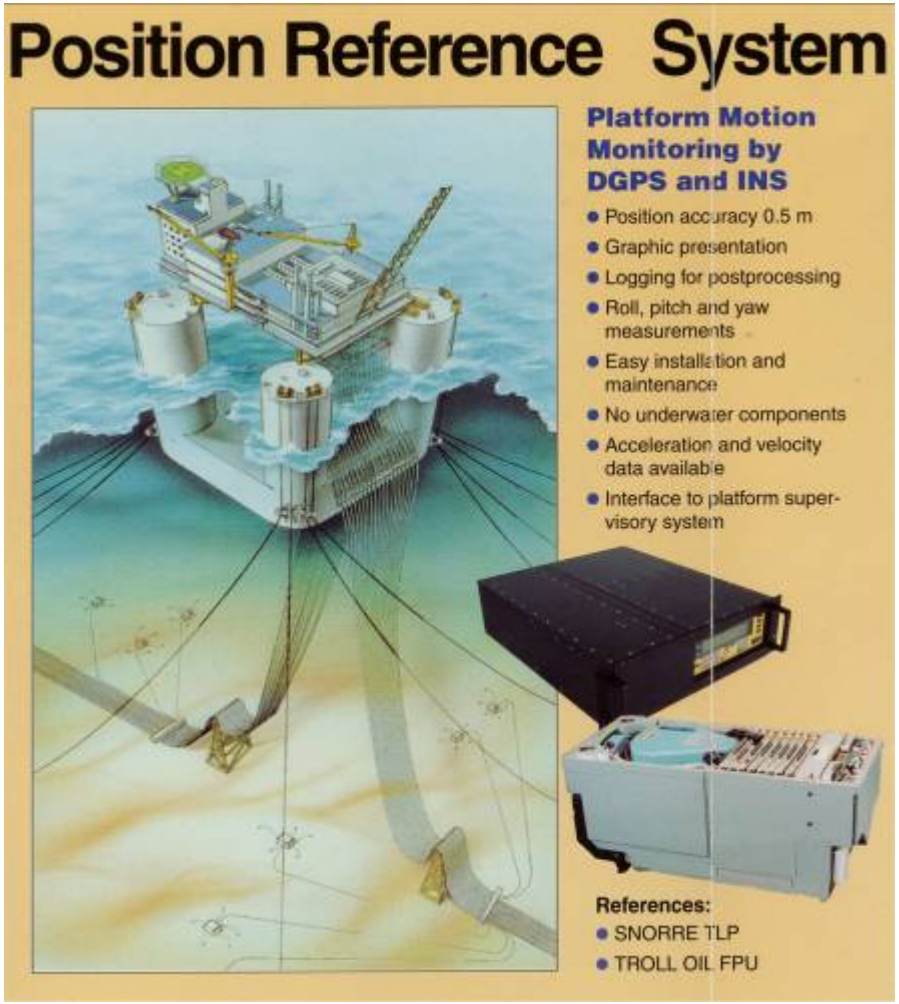


© KONGSBERG November 7, 2007

Return to Session Directory

# 5 x Flight Inspection and Calibration Systems

KONGSBERG

- Delivered to Civil Aviation authorities
- Used for inspection and calibration of ILS systems
- GPS RTK combined with Honeywell ring laser gyro
- “Tight coupling” GPS/IMU solution

© KONGSBERG November 7, 2007

Return to Session Directory

# 1 x Road Surveying System

- Delivered to the Norwegian Mapping Authority
- Used for road surveying in Norway and Sweden
- Cost-effective compared to airborne photogrammetry
- DGPS combined with Honeywell Ring Laser Gyro
- “Tight coupling” GPS/IMU solution

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

# The Future of GNSS

© KONGSBERG November 7, 2007

Return to Session Directory

# GNSS Compatibility and Interoperability

KONGSBERG

- Compatibility: different systems and services can live together
- Interoperability: combined use of systems and services will provide a better solution than individual systems/services
- There are strong drivers for compatible and interoperable Open Service solutions

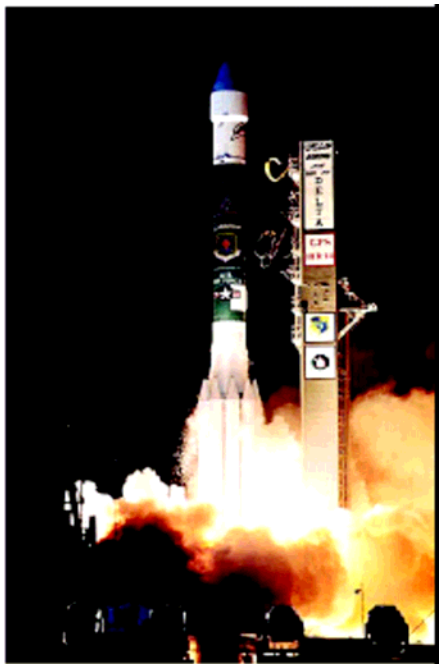

© KONGSBERG November 7, 2007

Return to Session Directory

# Existing and Future GNSS(*)

KONGSBERG

| GNSS | Satellites | Frequencies | FOC | Nationality |
|---|---|---|---|---|
| GPS | 24 | 2-3 | Now | US |
| Glonass | 24 | 2-3 | 2009? | Russia |
| WAAS | 3 | 1-2 | Now | US |
| EGNOS | 3 | 1 | 2009 | EU |
| Galileo | 30 | 3 | 2012? | EU |
| Gagan | 2 | 1 | 2010? | India |
| IRNSS | 7 | 2 | 2011? | India |
| Compass | 35 | 3 | 2010? | China |
| MSAS | 2 | 1 | 2010? | Japan |
| QZSS | 3 | 4 | 2010? | Japan |
| **Combined** | **133** | **2-4** | | |

(*) Specifications and plans subject to change without notice...

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

# GNSS Error Sources

© KONGSBERG November 7, 2007

Return to Session Directory

# GNSS Common Mode Failures

- Ionosphere
- Troposphere
- Electromagnetic environment
  - On purpose
  - Accidental
- Multipath
- Signal obstruction
- Hardware faults
- Software bugs

© KONGSBERG November 7, 2007

Return to Session Directory

# Example: Ionospheric Plasma Bubble Depletion

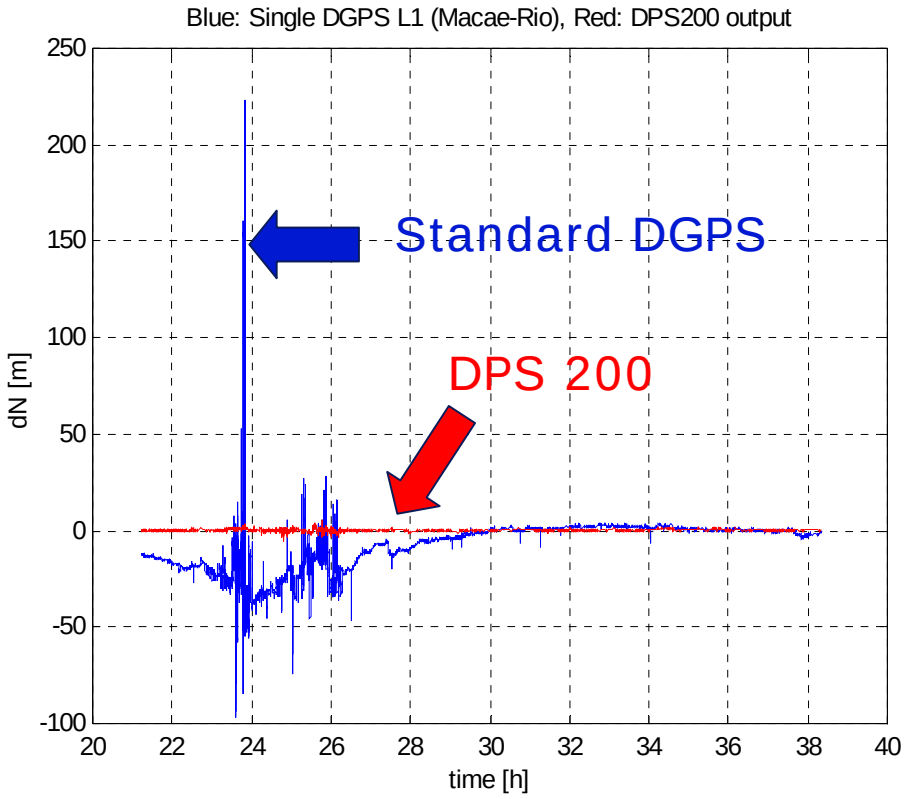


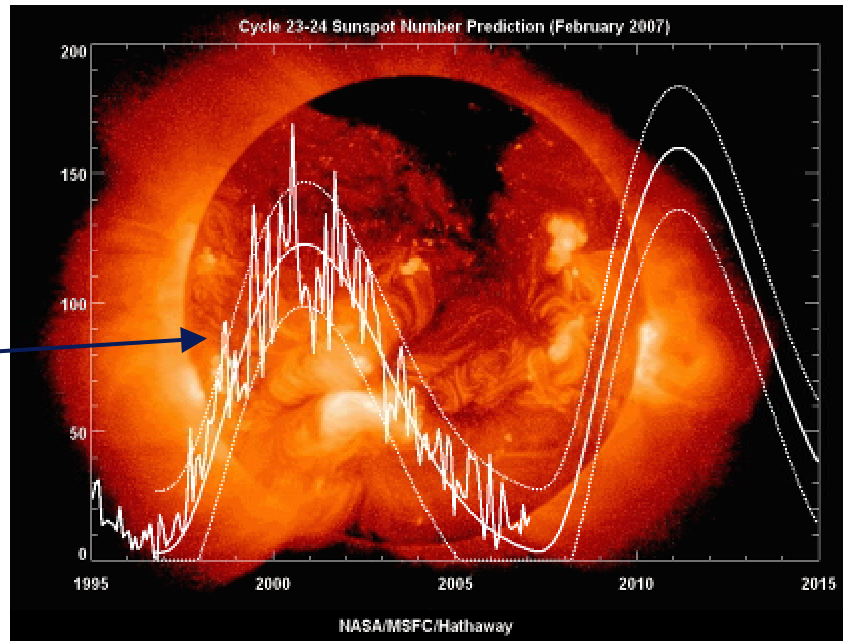


© KONGSBERG November 7, 2007

Return to Session Directory

# Current GNSS Error Protection Strategies

KONGSBERG

| Error source | Protection Strategies | Vulnerability |
|---|---|---|
| **Ionosphere** | Differential corrections<br>Multiple frequencies<br>Multiple satellite constellations | **High** |
| **Troposphere** | Differential corrections<br>Model compensation | **Low** |
| **Hostile EM interference** | Multiple frequencies | **Medium** |
| **Accidental EM interference** | Multiple frequencies<br>Antenna installations | **High** |
| **Multipath** | Signal correlator techniques<br>Code-carrier filtering<br>Multiple frequencies | **Low** |
| **Signal obstruction** | Multiple satellite constellations<br>Antenna installations | **Medium** |
| **Hardware faults** | Redundant installations | **Medium** |
| **Software bugs** | Development standards<br>Signal simulation<br>SW architecture<br>Testing, testing, testing… | **Medium** |

© KONGSBERG November 7, 2007

Return to Session Directory

# Still Need for Improvements

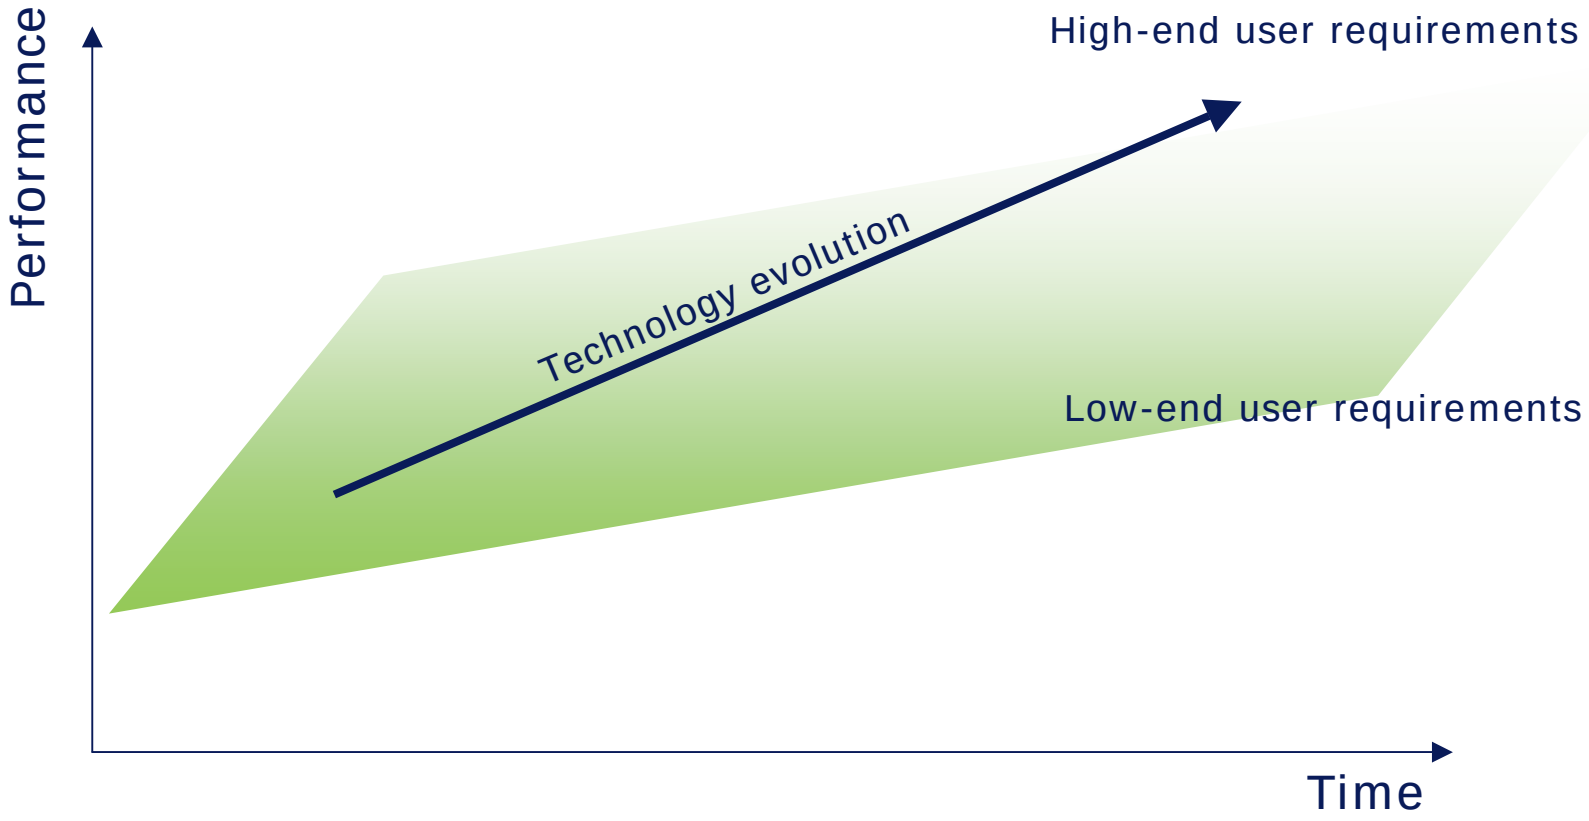


© KONGSBERG November 7, 2007

Return to Session Directory

# GNSS Technology Limitations

- There will be limits to the level of performance of GNSS solutions - like every other technology – constrained by underlying fundamental principles
- Fusion between different principles might have the potential to overcome these limitations
- There is a long tradition for integrating GNSS and Inertial technology

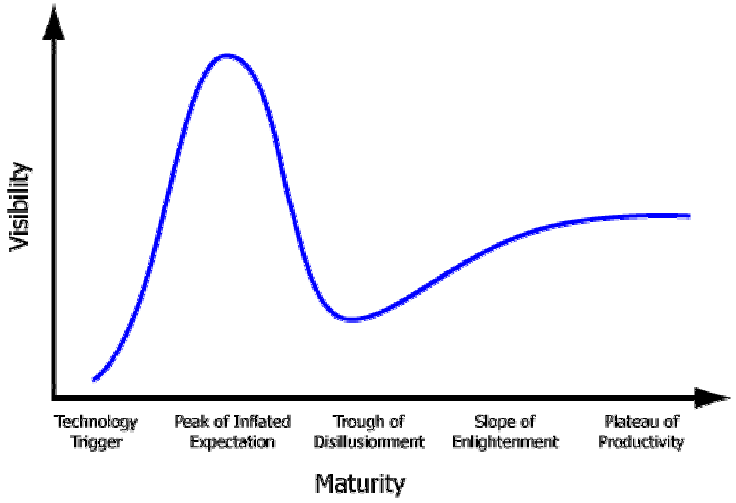


**Gartner's hype curve – a reminder…**

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

# Integrated GNSS/IMU for DP Operations

© KONGSBERG November 7, 2007

Return to Session Directory

# Advantages for DP Operations

KONGSBERG

1. Improved availability of GNSS signals
   - Re-acquisition of satellite signals
   - Reduced risk of re-initialization for high precision solutions
2. Improved reliability of Position and Velocity
   - RAIM
   - Integrity check of GNSS data
3. More reliable and accurate lever arm compensation of Position and Velocity
4. Back-up Position and Velocity for a limited period of time during periods when no GNSS signals are available

© KONGSBERG November 7, 2007

Return to Session Directory

# Challenges/Pitfalls

KONGSBERG

- Cost of IMU/INS technology
  - ☒ Utilize emerging, “low-cost”, technologies (MEMS, FOG)
  - ☒ Focus on real performance requirements – avoid over specification
- Complexity of installations and maintenance
  - ☒ Training and awareness
  - ☒ Toolbox
- Complexity to DP operator
  - ☒ Careful Design of User Interfaces
- Export licenses
  - ☒ Adapt technical solutions to regulative categorization
- Processing power requirements
  - ☒ CPU utilization
  - ☒ Software architecture
- Regulations?
  - ☐ Needs clarification

© KONGSBERG November 7, 2007

Return to Session Directory

# Regulatory Positions

KONGSBERG

”Two of the position reference systems may operate on the same principle. A Single failure is not to affect simultaneously more than one position reference system, i.e., no common mode failures.”, ***ABS (4-3-5) Section 15.7.2***

”When more than one position reference system is required, at least two shall be based on different principles.”, ***DNV (6-7-3) Section C101***

”At least three position reference systems incorporating at least two measurement techniques as defined in 4.3.2 are to be provided and are to be arranged so that a failure in one system will not render the other system inoperative.”, ***LRS (7-4) Section 5.3.4***

”When two or more position reference systems are required, they are not all to be of the same type, but based on different principles and suitable for the operating conditions.”, ***BV Section 4.43.14***

”When two or more position reference systems are required, they are not both (all) to be of the same type, but based on different principles and suitable for the operating conditions.”, ***CCS Section 6.8.1***

© KONGSBERG November 7, 2007

Return to Session Directory

# A Regulatory Challenge

KONGSBERG

What about hybrid systems, like integrated GNSS/IMU, based on at least two completely different physical principles?

*Standards are always out of date.*

*That is what makes them standards.*

Alan Bennett

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

# GNSS/IMU Solution Architecture

© KONGSBERG November 7, 2007

Return to Session Directory

# Traditional Approach I – Easy…

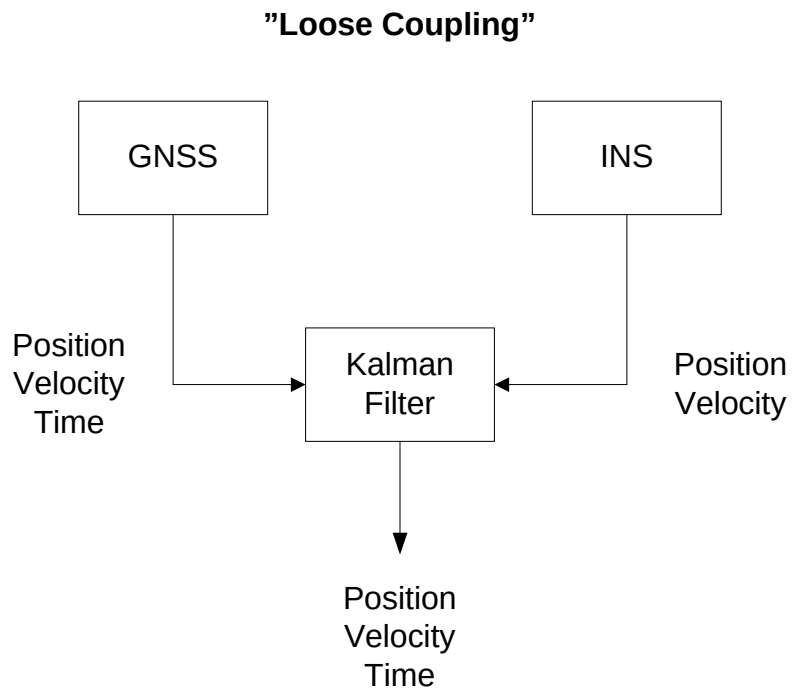


- Combining position and velocity from GNSS and INS
- Lever arm compensation of position and velocity possible
- Position available during short GNSS outages but requires high grade INS
- "Sensor" aiding not possible
- Advanced GNSS processing capacity wasted

© KONGSBERG November 7, 2007

Return to Session Directory

# Traditional Approach II – a Little More Complicated...

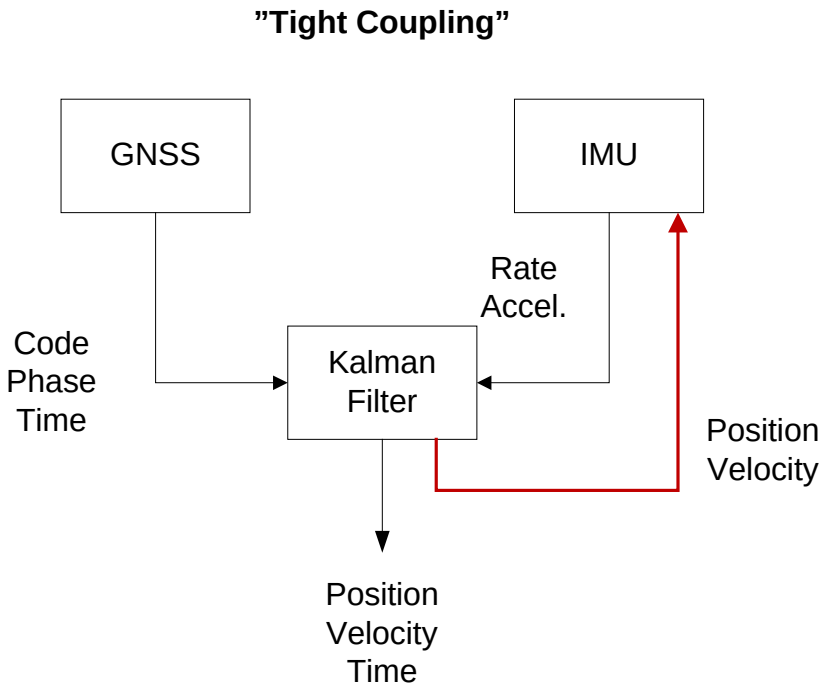


- Utilizing raw measurements rather than positions
- Aiding the IMU with position and velocity data to compensate bias and noise
- Increased processing power requirements

© KONGSBERG November 7, 2007

Return to Session Directory

# Traditional Approach III – Even More Complicated…

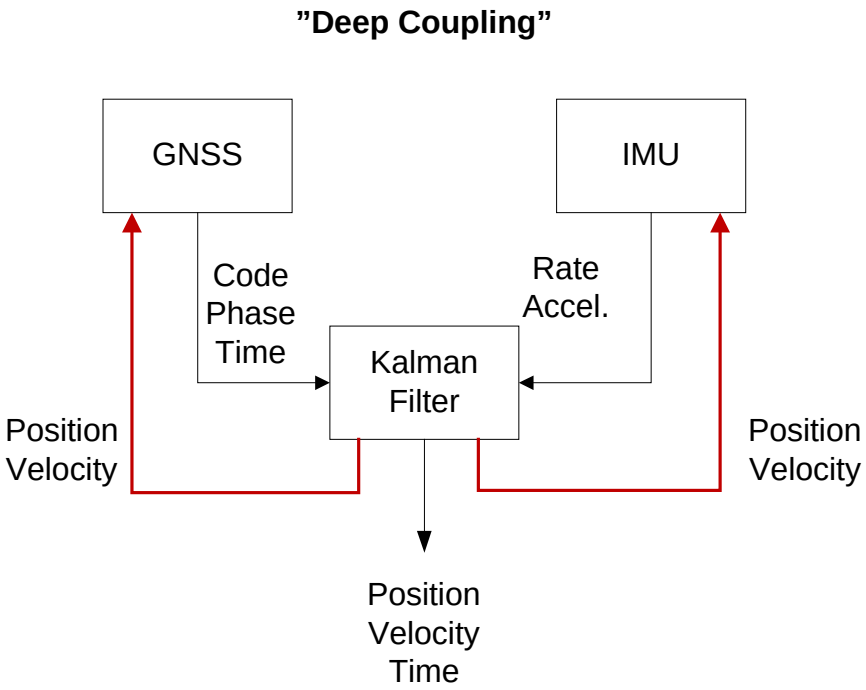


- Feed-back loop both to IMU and GNSS receiver
- Aiding of tracking loops
- Improves Time-To-First-Fix (TTFF) and re-acquisition time
- GNSS receiver design needs to allow feed-back to core signal processing

© KONGSBERG November 7, 2007

Return to Session Directory

# The Advanced Approach

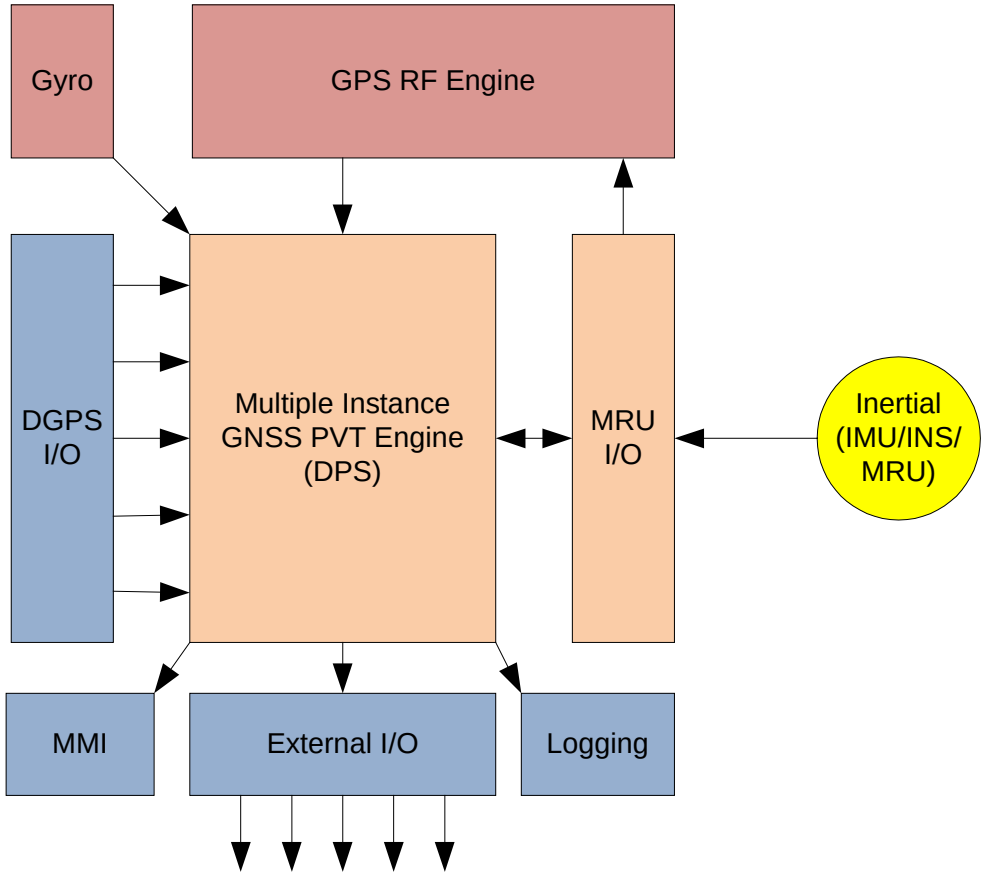


- Taking advantage of powerful processing capacity
- Multiple instance architecture enables improved reliability and stability
- Inertial data for aiding GPS tracking loops, and reducing re-acquisition time
- Inertial data for enhanced RAIM capabilities
- Reducing the requirements of the IMU/INS and enables “the right solution for the job”

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

# Test Flights

# 2007

© KONGSBERG November 7, 2007

Return to Session Directory

# Test Platforms

KONGSBERG

Vehicle Platforms

© KONGSBERG November 7, 2007

Return to Session Directory

# Behind the Scene

KONGSBERG

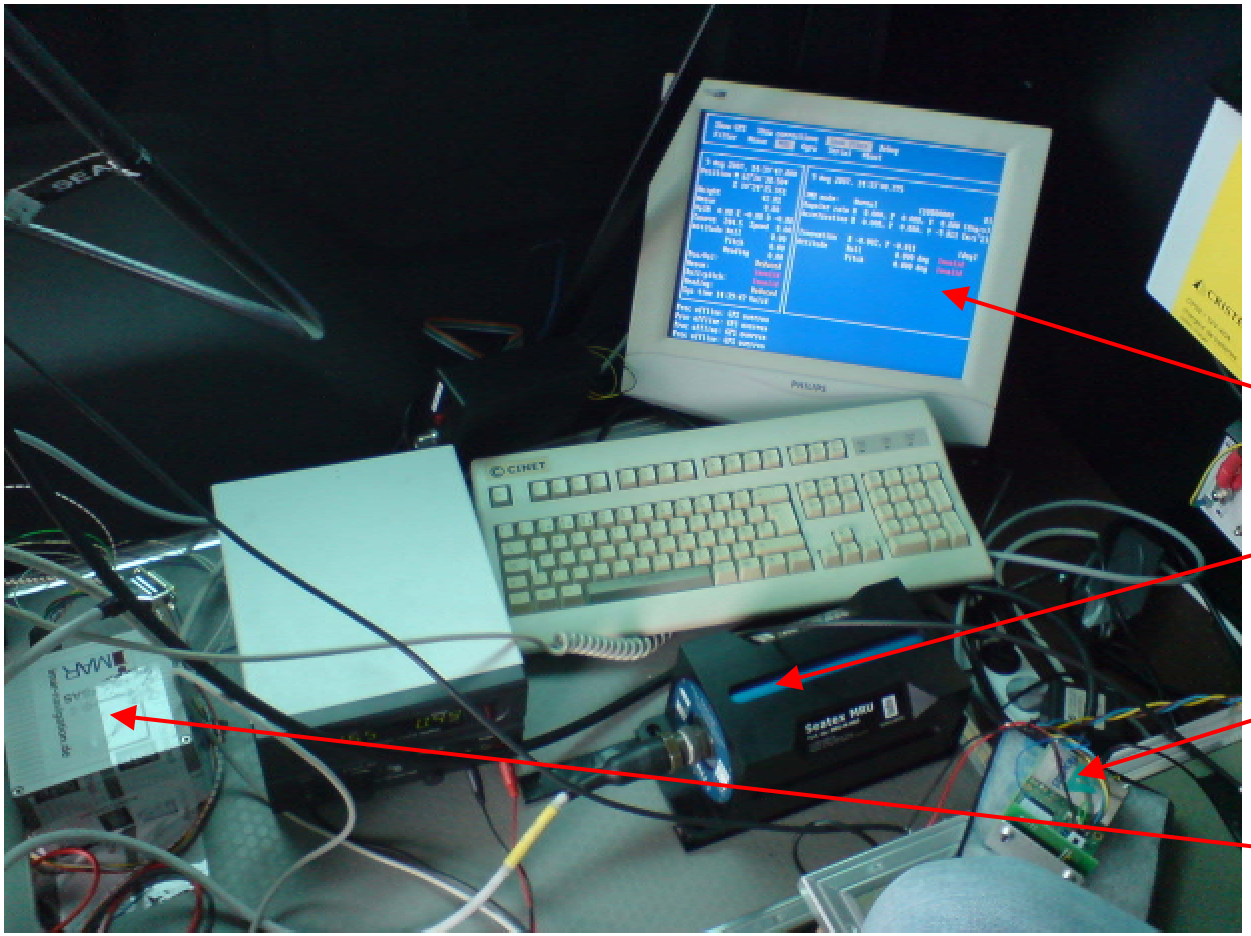

Test software

MRU 5 (INS)

GPS Engine

iMAR IMU

© KONGSBERG November 7, 2007

Return to Session Directory

# Some Test-Results

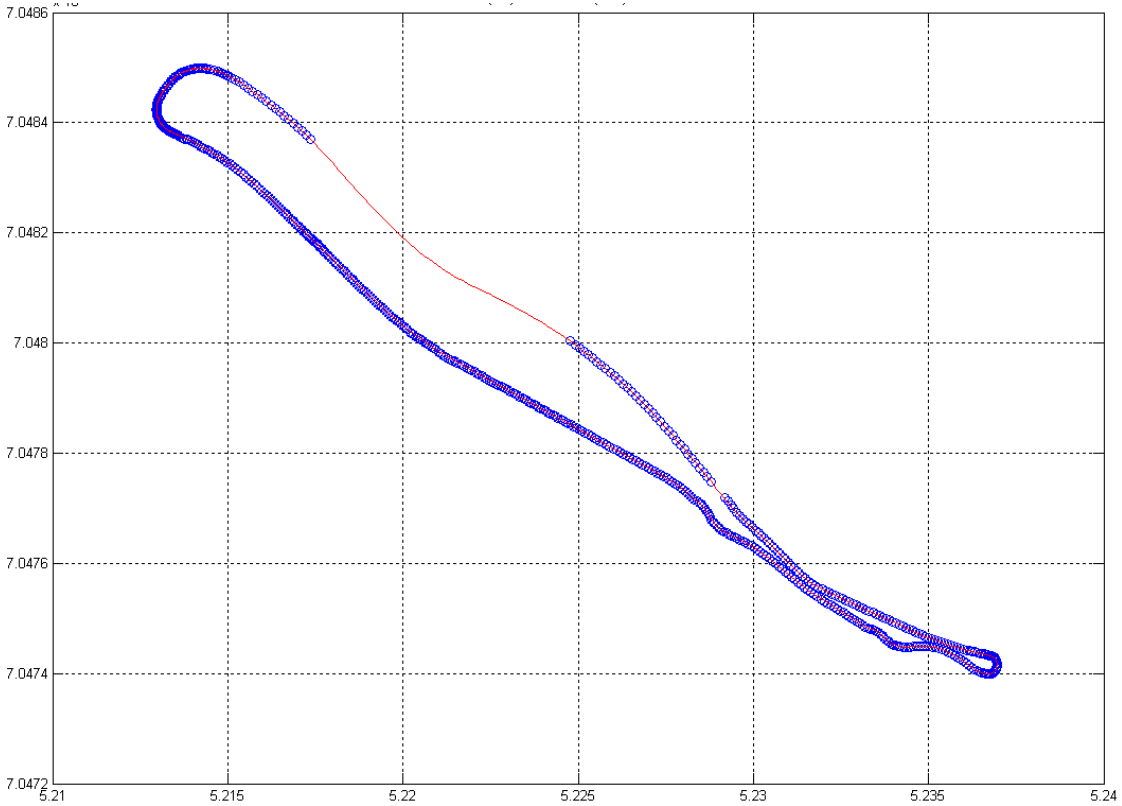


Scenario:

Tunnel driving outside Trondheim

Blue – GPS position

Red – GPS/IMU position

© KONGSBERG November 7, 2007

Return to Session Directory

# Some More Test-Results

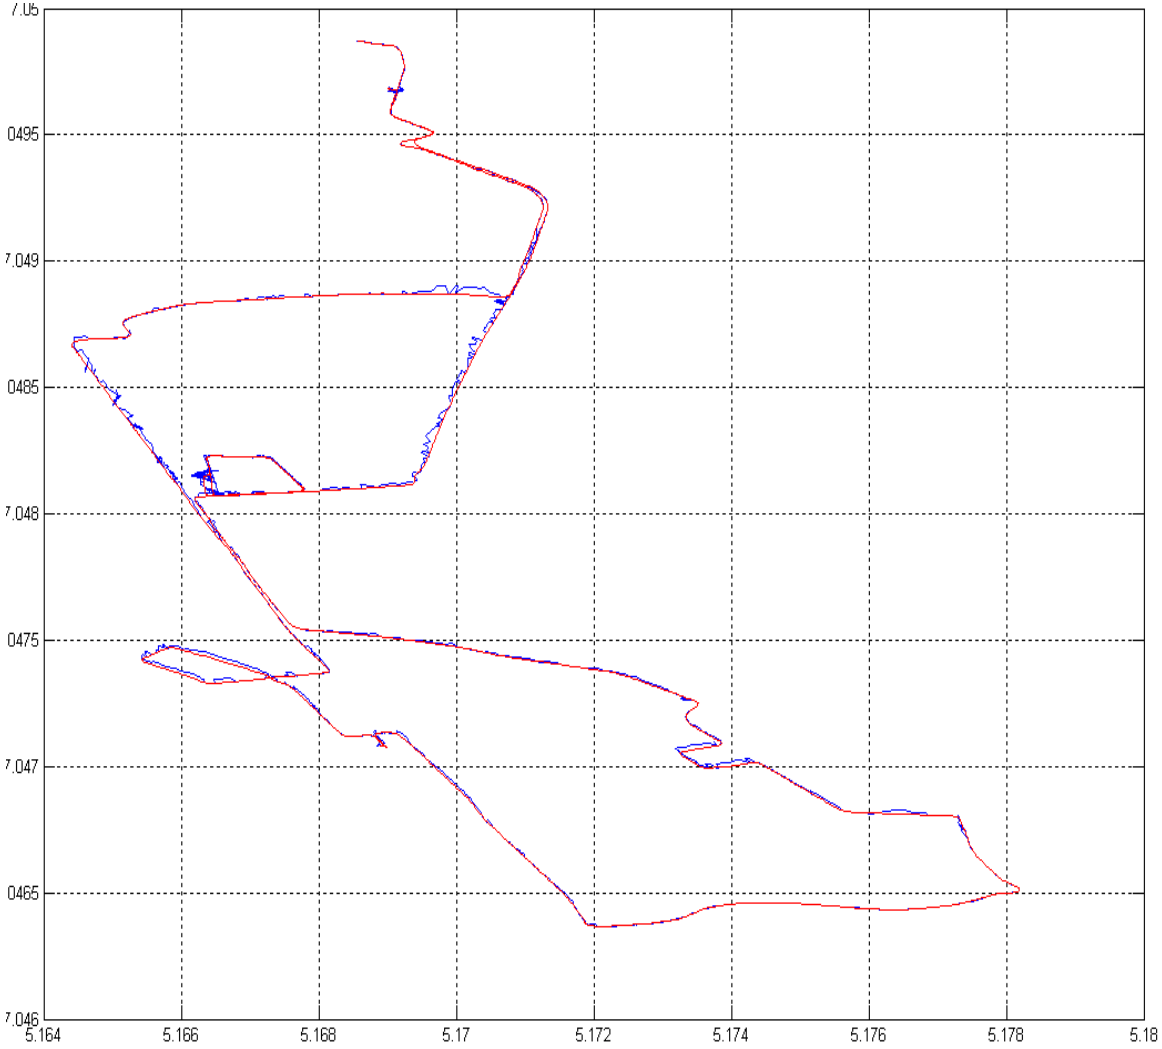


Scenario:

Driving down-town Trondheim

Blue – GPS position

Red – GPS/IMU position

© KONGSBERG November 7, 2007

Return to Session Directory

# Graphical User Interface Snap-Shot

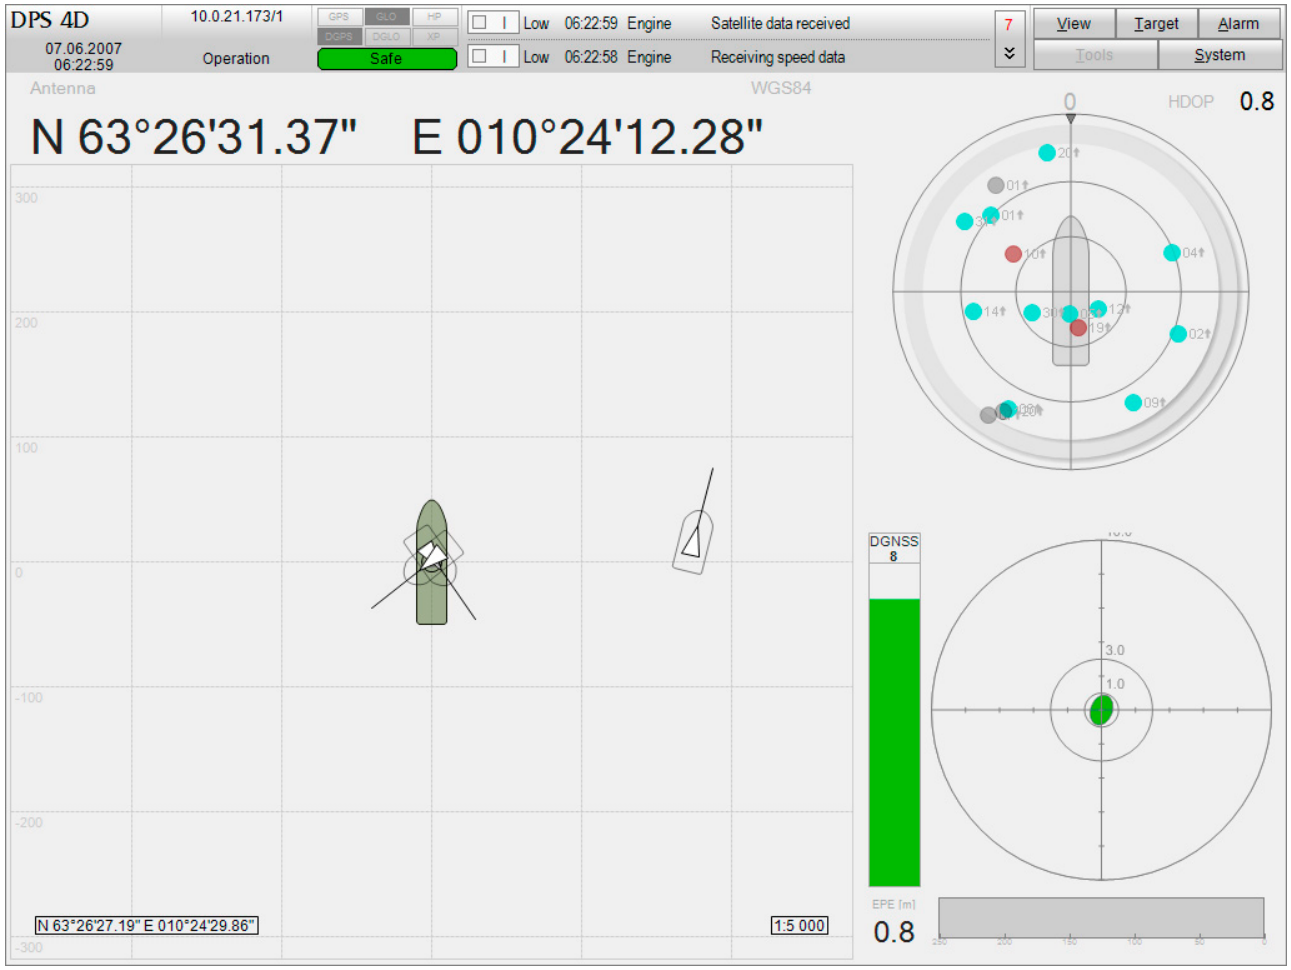


- User interfaces should focus on <u>operational</u> efficiency
- Complex functionality should not lead to complex user interfaces
- User interfaces should be harmonized across applications and instruments

© KONGSBERG November 7, 2007

Return to Session Directory

# Conclusion

- An optimal hybridization between GNSS and inertial technology for DP Position Reference Systems requires modifications to both technologies
- “One size doesn’t fit all”
- Systems should be carefully designed to avoid added complexity to the DP operator

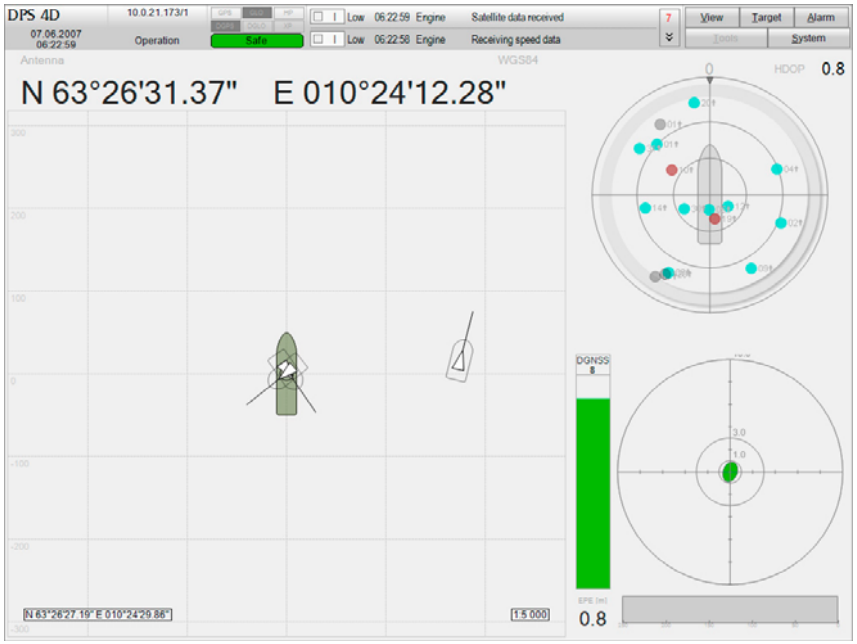

© KONGSBERG November 7, 2007

Return to Session Directory

KONGSBERG

**WORLD CLASS** – through people, technology and dedication

Return to Session Directory